

LUCENETM LC100

Polyolefin Elastomer for Polymer Modification

- Applications**
- Shoe sole, Sealing layer in packaging film, Wire and cable, Hose
 - General purpose and polymer modification

- Performance**
- Improves resiliency and cushioning for midsole
 - Excellent clarity and low sealing temperature of film
 - High performance electrical insulation and jacketing

Resin Properties	Test methods	Units	Values ⁽¹⁾
Melt Index, 2.16kg/190℃	ASTM D 1238	g/10min	1.2
Density @ 23℃	ASTM D 1505	g/cm ³	0.903
Mooney viscosity, ML ₁₊₄ @ 121℃	ASTM D 1646	MU	23

Physical Properties	Test methods	Units	Values ⁽²⁾
Tensile Strength @ Break	ASTM D 638 ⁽³⁾	MPa	24.5
Elongation @ Break	ASTM D 638 ⁽³⁾	%	660
Flexural Modulus, 1%	ASTM D 790	Mpa	83
Hardness, Shore A	ASTM D 2240	-	88
Tear Strength, Type C	ASTM D 624	kN/m	87

Thermal Properties	Test methods	Units	Values
Melting Point, DSC	LG Method	℃	96
Glass Transition Temperature	LG Method	℃	-31

(1) The properties data in this table are typical values, and not guaranteed specification.

(2) Typical resin property values are measured on a standard compression molded specimens

(3) Speed of 508 mm/min.



Head Office : NCC/PO Division, LG Chem, Ltd.

LG Twin Tower 23F, Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721, Korea

Tel : 82-2-3773-3053, 7184, Fax : 82-2-784-9731~3

Tech Center : 84, Jang-dong, Yuseong-gu, Daejeon 305-343, Korea

Tel : 82-42-860-8549, 8550, Fax : 82-42-862-1318

LUCENETM LC100

Polyolefin Elastomer for Polymer Modification



•Description

LUCENE LC100 is an ethylene-octene copolymer produced using LG Chem's metallocene polymerization catalyst and solution process technology.

This resin offers excellent performance in shoe sole application and high clarity, low sealing temperature and high hot-tack strength in film.

•Regulatory requirements

LC100 complies with FDA regulation 21 CFR 177.1520

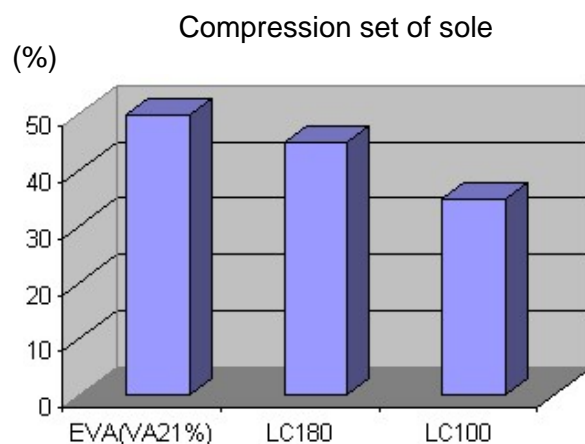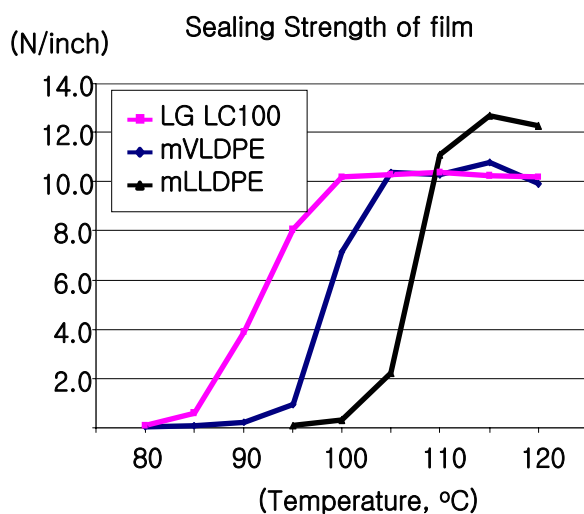

*** Notice**

Because LG Chem cannot anticipate or control the many different conditions under which this information and/or product may be used, it does not guarantee the applicability or the accuracy of this information or the suitability of its products in any given situation. Before using LG Chem product, customer and other users should make their own independent determination that the product is suitable for the intended use. They should also ensure that they can use the LG Chem product safely and legally. Nothing contained herein shall constitute any warranty (express or implied, of merchantability, fitness for a particular purpose or otherwise), nor is protection from any law or patent to be inferred. No one is authorized to make such warranties or assume any liabilities on behalf of LG Chem except in writing signed by a duly authorized LG Chem employee. Unless otherwise agreed in writing, the exclusive remedy for all claims is replacement of the product or refund of the purchase price at LG Chem's option, and in no event shall LG Chem be liable for special, consequential, incidental, punitive or exemplary damages.



Head Office : NCC/PO Division, LG Chem, Ltd.

LG Twin Tower 23F, Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721, Korea

Tel : 82-2-3773-3053, 7184, Fax : 82-2-784-9731~3

Tech Center : 84, Jang-dong, Yuseong-gu, Daejeon 305-343, Korea

Tel : 82-42-860-8549, 8550, Fax : 82-42-862-1318